




ULTIMATE

COLLECTION

FlorONE[®]
CARPET TILES


MILKYWAY

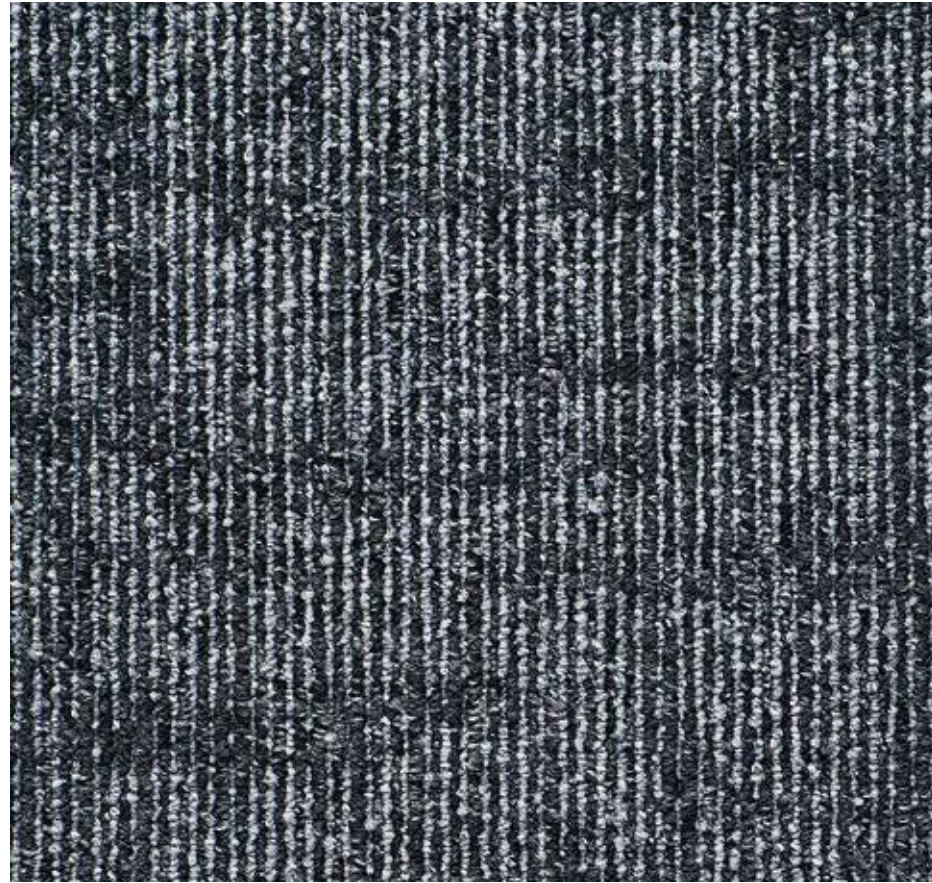


01 GREY



01 GREY



NATURAL

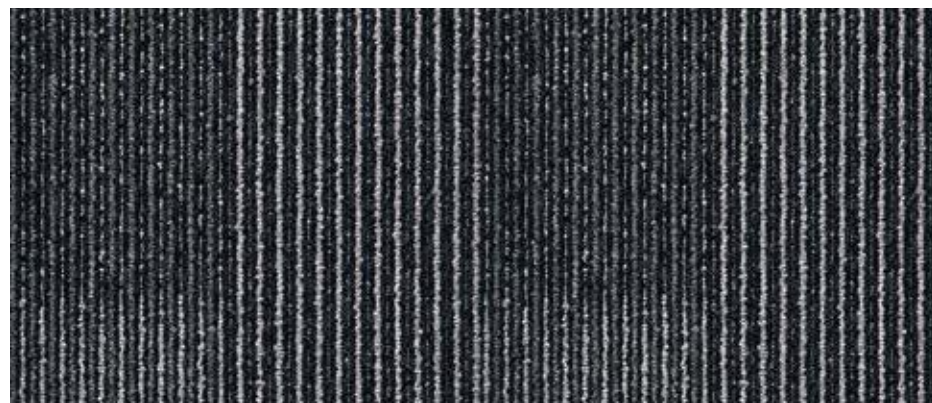

02 ANTHRACITE



06 CAFECREME



06 CAFECREME



RAIN



02 ANTHRACITE




07 TAUPE




05 NAVY BLUE




02 ANTHRACITE




FOGGY

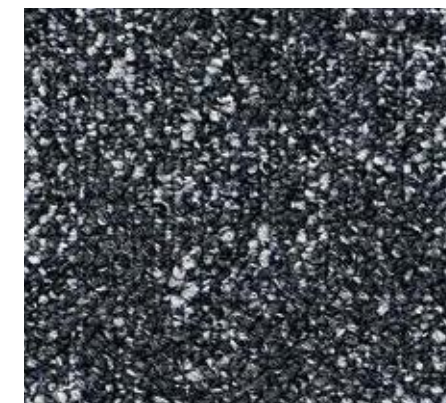

01 GREY

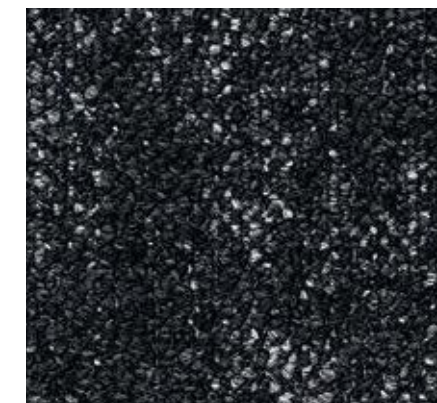

02 ANTHRACITE

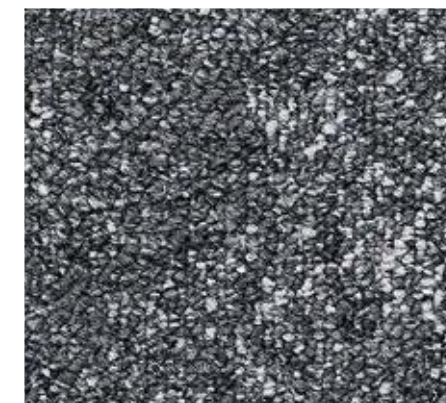


03 LIGHT GREY




07 TAUPE




01 GREY




TWILIGHT

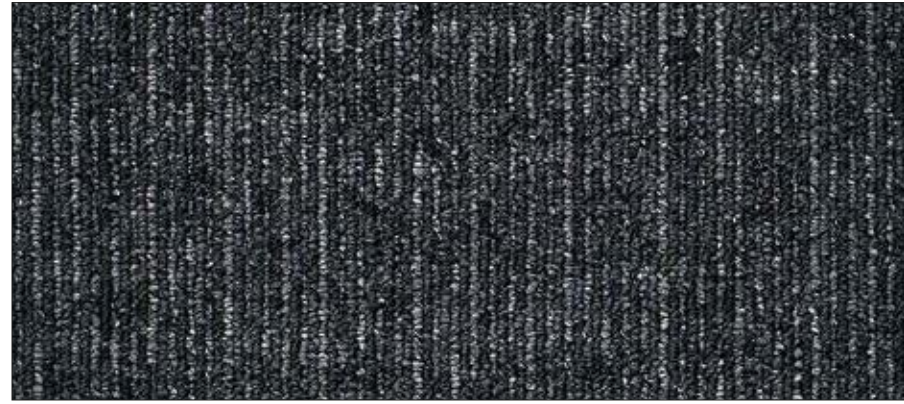

01 GREY

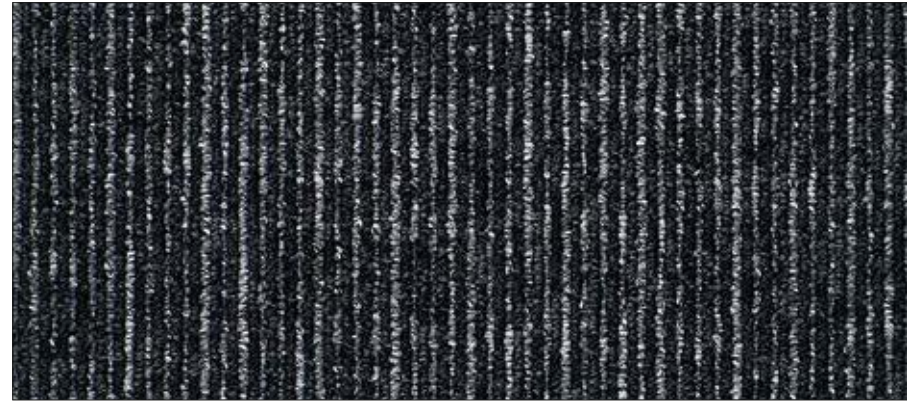

02 ANTHRACITE

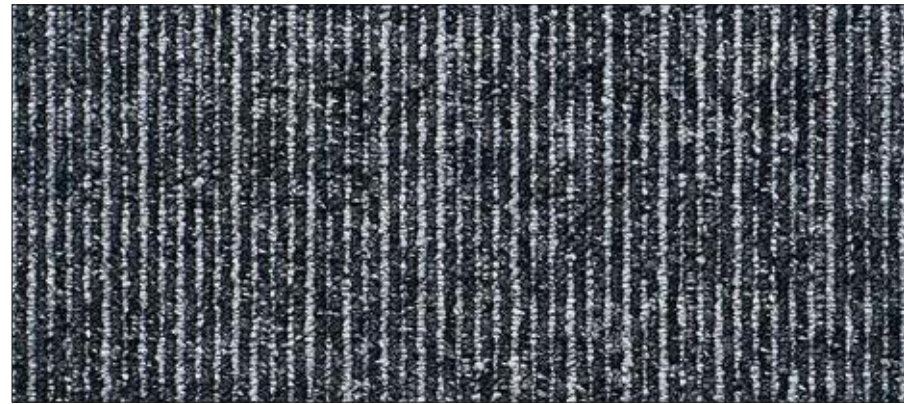

03 LIGHT GREY



07 TAUPE




03 LIGHT GREY




SMOKEY



01 GREY

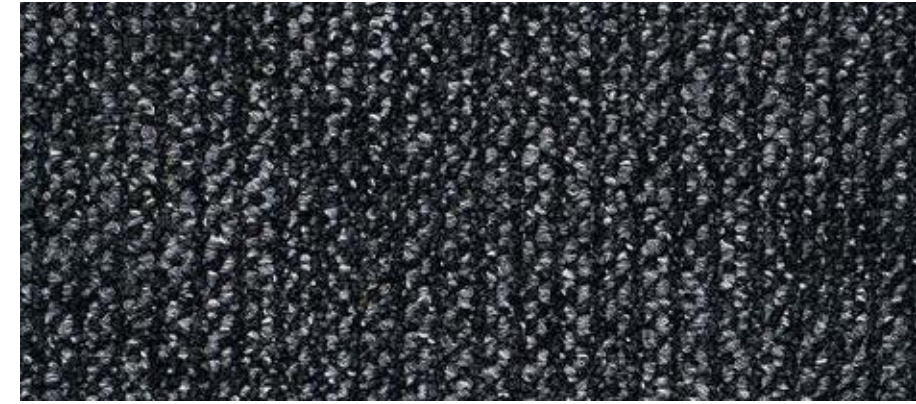

02 ANTHRACITE

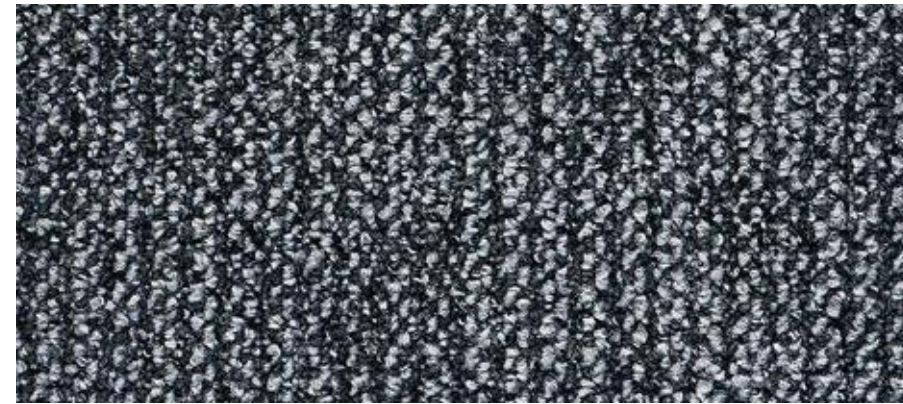

03 LIGHT GREY









04 CAPPUCCINO






















01 GREY








specifications - teknik veriler

						
style name	milkyway	natural	rain	foggy	twilight	smokey
tuft gauge	1/10 loop pile	1/10 loop pile	1/10 loop pile	1/10 loop pile	1/10 loop pile	1/10 loop pile
pile composition	100% PA SDN	100% PA SDN	100% PA SDN	100% PA SDN	100% PA SDN	100% PA SDN
primary backing	Non Woven	Non Woven	Non Woven	Non Woven	Non Woven	Non Woven
secondary backing	Bitumen	Bitumen	Bitumen	Bitumen	Bitumen	Bitumen
pile height	3,00 mm	3,00 mm	4,00 mm	3,50 mm	3,00 mm	3,00 mm
pile density	0.152 gr/cm ³	0.152 gr/cm ³	0.137 gr/cm ³	0.126 gr/cm ³	0.131 gr/cm ³	0.111 gr/cm ³
pile weight	740 gr/m ²	650 gr/m ²	785 gr/m ²	770 gr/m ²	720 gr/m ²	630 gr/m ²
total weight	4500 gr/m ² ± 15%	4395 gr/m ² ± 15%	4540 gr/m ² ± 15%	4525 gr/m ² ± 15%	4480 gr/m ² ± 15%	4380 gr/m ² ± 15%
total height	6,00 mm	6,00 mm	7,00 mm	6,50 mm	6,00 mm	6,00 mm
number of knots	240881/m ² -7,5% .+10%	237000/m ² -7,5% .+10%	259000/m ² -7,5% .+10%	240379/m ² -7,5% .+10%	240881/m ² -7,5% .+10%	200971/m ² -7,5% .+10%
use class	Extreme / Heavy (33)	Extreme / Heavy (33)	Extreme / Heavy (33)	Extreme / Heavy (33)	Extreme / Heavy (33)	Extreme / Heavy (33)
castor chair test	A (EN 985)	A (EN 985)	A (EN 985)	A (EN 985)	A (EN 985)	A (EN 985)
dimensional stability	Pass (EN 986)	Pass (EN 986)	Pass (EN 986)	Pass (EN 986)	Pass (EN 986)	Pass (EN 986)
sound absorption	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)	ca. 25 dB (ISO 354)
thermal resistance	ca 0,08 m ² K/W	ca 0,08 m ² K/W	ca 0,08 m ² K/W	ca 0,08 m ² K/W	ca 0,08 m ² K/W	ca 0,08 m ² K/W
light fastness	≥ 5	≥ 5	≥ 5	≥ 5	≥ 5	≥ 5
static loading	Anti-Static	Anti-Static	Anti-Static	Anti-Static	Anti-Static	Anti-Static
wearability	≥ 4	≥ 4	≥ 4	≥ 4	≥ 4	≥ 4
water fastness	≥ 4	≥ 4	≥ 4	≥ 4	≥ 4	≥ 4
fire classification	Bfl-S1 1658-CPR-3134	Bfl-S1 1658-CPR-3134	Bfl-S1 1658-CPR-3134	Bfl-S1 1658-CPR-3134	Bfl-S1 1658-CPR-3134	Bfl-S1 1658-CPR-3134
tile size	50 x 50 cm ± 1%	50 x 50 cm ± 1%	50 x 50 cm ± 1%	25 x 100 cm ± 1%	50 x 50 cm ± 1%	50 x 50 cm ± 1%

							
monolithic	1/4 turn	random	ashlar	brick	monolithic	ashlar	brick

										
									DS	Bfl-s1

				
---	---	---	---	---

Yetkili Satıcı / Authorized Dealer



FlorONE[®]
CARPET TILES

www.floronecarpettiles.com