LOW EMBODIED CARBON | CARBON NEUTRAL | CLOSED LOOP RECYCLING

Floor Architecture III

ShawContract®

Our Floor Architecture collections have always replicated the forms of natural stone, polished concrete, pebbles and small rocks.

Floor Architecture III is now available in **three styles**; Stone and Fragment are joined by Formation, a more structured geometric pattern.

All styles are available in **three colour groups**. Saturated, Pastel and Subtle Colour Accent. The result of a six month colour exploration, these new colours create a fresh and sophisticated modern palette. 27 options; 18 new colours and 9 neutrals.

Available in all **three backings**: EcoWorx S, TaskWorx and ComfortWorx.

three styles, three colour groups, three backings

COVER **FORMATION COLOURS** SAGE INSTALLED IN BRICK

3

3 Styles: Stone, Fragment and Formation

3 Colour groups:
Saturated: Intensity of shade without being bright
Pastel: Soft and delicate shades of colour
Subtle Colour Accent: Functional use of colour, without being bold

3 Backing Options: EcoWorx S, TaskWorx, ComfortWorx

Oatmeal 04111
Brushed Gold 04210
Midnight Brushed Gold 04211
Copper 04865
Apricot 04675
Midnight Apricot 04674
Rosewood 04870
Powder Pink 04800
Midnight Powder Pink 04801
Steel Blue 04447
Mineral 04327
Midnight Mineral 04328
Denim 04486
Sky 04411
Midnight Sky 04412
Racing Green 04334
Sage 04375
Midnight Sage 04376

Colour Combinations

The beauty of FAIII is that every colourway in the collection has a certain level of contrast and balance. Offering endless options in which you can combine different strengths of colour.

Saturated

Pastel

Subtle Colour Accent

Colour Palette

Each horizontal line represents a colour type: Top: Saturated, Middle: Pastel, Bottom: Subtle Colour Accent.

Colours also work in columns of colours in tones. The grey with Subtle Accent Colour is informed from the Pastel colour above, this applies to each colour column. Each group has balance and depth of shade that means colours can be combined without any conflict.

Saturated:


Copper 04865


Rosewood 04870

Denim 04486


Steel Blue 04447

Pastel:


Apricot 04675


Powder Pink 04800


Sky 04411


Mineral 04327

Subtle Colour Accent:


Midnight Apricot 04674


Midnight Powder Pink 04801

Midnight Sky 04412

Midnight Mineral 04328

Work with a group of Saturated Colours and you can create an earthy, grounded feel. Use Pastels to create a gentle and considered palette, or for less colour requirements – use the Midnight (grey) Subtle Accent Colour line to incorporate colour without making a bold statement.

Colours

Racing Green 04334


Brushed Gold 04210

Sage 04375


Oatmeal 04111


Midnight Sage 04376

Midnight Brushed Gold 04211

Neutrals

Mica 53518

Mortar 53530

Mix 53597

Marble 53100

Limestone 53535

Chromite 53580

Anthracite 53555


Granite 53500

Azurite 53485

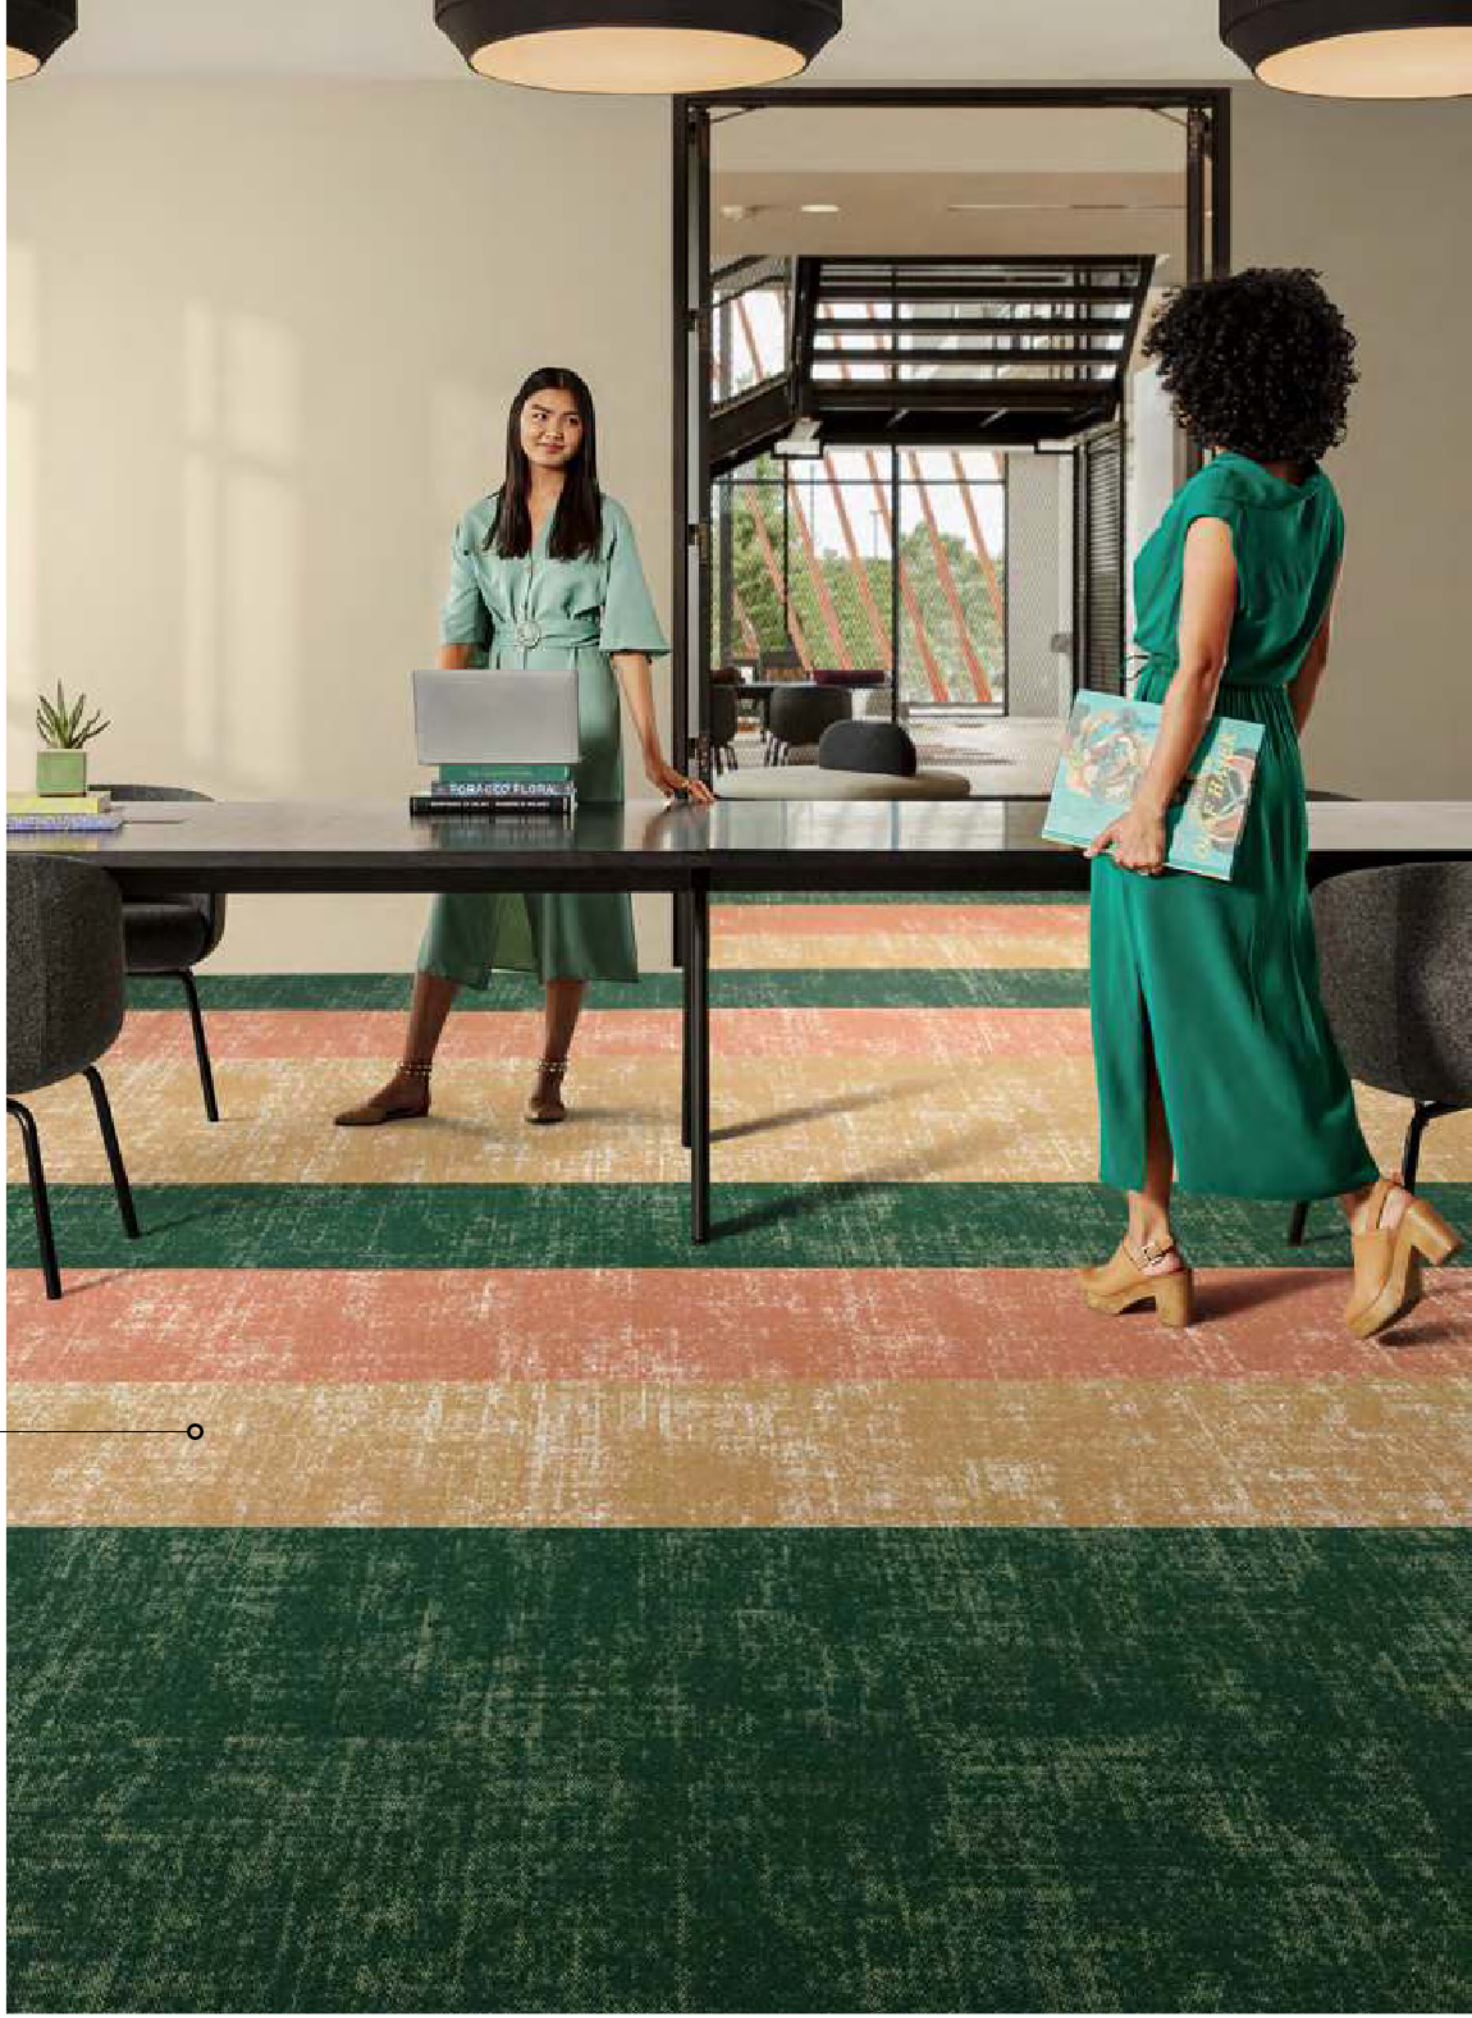

FRAGMENT COLOURS ● COMBINING RACING GREEN, BRUSHED GOLD & APRICOT INSTALLED IN MONOLITHIC

Saturated Palette

Displaying how you can combine Saturated tones and a pastel tone to create a balanced interior scheme.

Saturated palette – Earthy, grounded. Offers reassurance & stability. Luxurious and timeless quality.

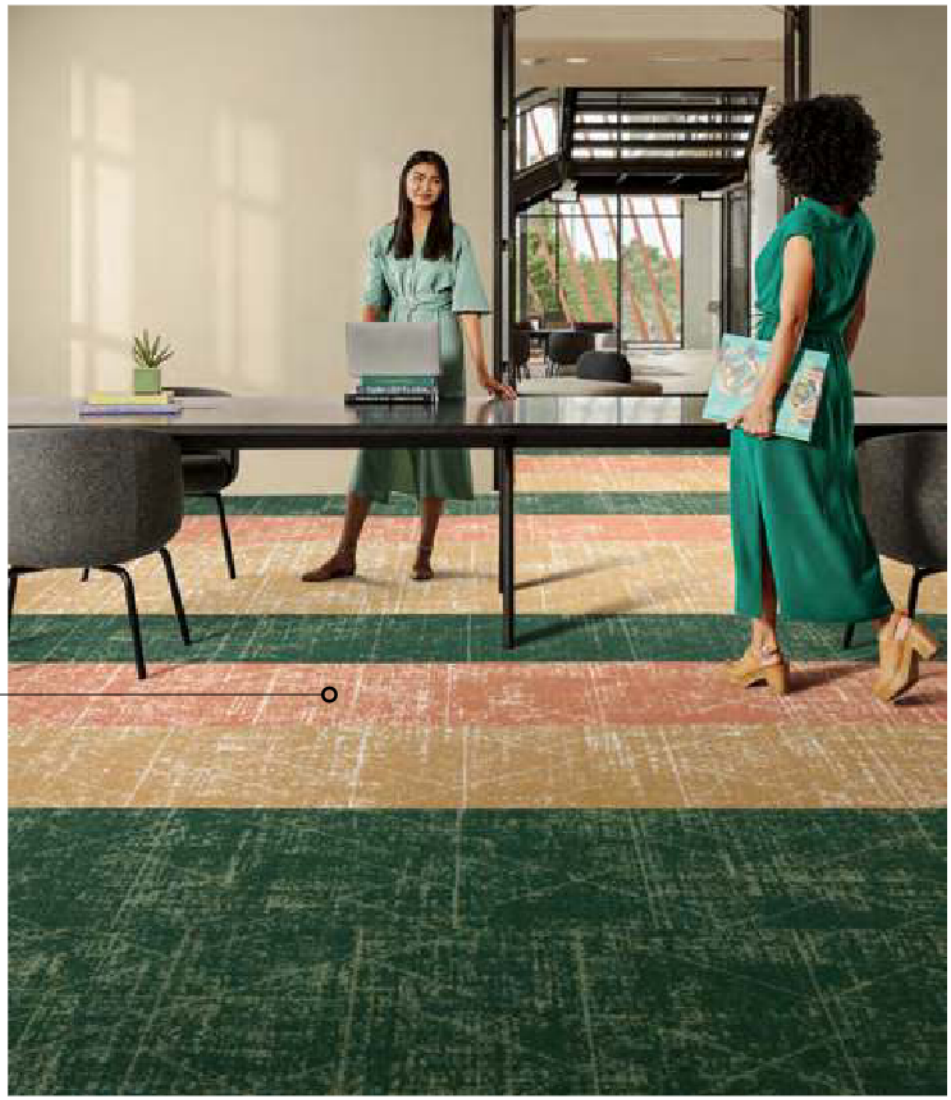

FORMATION COLOURS COMBINING RACING GREEN, BRUSHED GOLD & APRICOT INSTALLED IN BRICK

Pastel Palette

Displaying how you can combine three different pastel tones to create a balanced interior scheme.

FRAGMENT COLOURS ● COMBINING MINERAL, OATMEAL AND POWDER PINK INSTALLED IN MONOLITHIC

Pastel palette – Gentle, considered. Informed by nature with an optimistic and refreshing tone. Serene vibes.

FORMATION COLOURS ● COMBINING MINERAL, OATMEAL & POWDER PINK INSTALLED IN BRICK

FORMATION COLOURS ● SAGE AND MIDNIGHT SAGE INSTALLED IN BRICK

Subtle Colour Accent Palette

Displaying how you can combine subtle accents with a few pastel and a saturated tones to create a 'hint of colour' for an interior scheme.

Subtle Colour Accent palette – Layered and reliable. Restrained tones with hints of subtle accents.

FORMATION COLOURS MIDNIGHT SAGE INSTALLED IN BRICK

STONE ● CHROMITE INSTALLED IN MONOLITHIC

The existing 9 neutrals from Floor Architecture II are now available in all 3 styles; Stone, Fragment & Formation. These 9 neutrals to make up part of the total 27 colours available in FAIII. The original neutrals remain the foundation of this collection.

LRV & L*: Light Reflectance Values

Light Reflectance Values and L*

LRV is a measurement that indicates how much light a surface reflects and how much it absorbs.

Understanding the Light Reflectance Values of surfaces enables interior lighting levels to be optimised and colours to be contrasted.

Designers can use the L* value for determining lighting levels or the LRV (Y) value to compare the carpet tile colours to edgings and other surface finishes.

Other style LRV's can be found on the shaw contract website.

	Colour name	Colour number	LRV	L*
Fragment colours Colours available	oatmeal	04111	27.0	58.98
	brushed gold	04210	22.4	54.44
	midnight brushed gold	04211	6.9	31.52
	mineral	04327	17.9	49.42
	midnight mineral	04328	8.3	34.63
	racing green	04334	5.3	27.67
	sage	04375	19.3	51.02
	midnight sage	04376	6.4	30.37
	sky	04411	18.8	50.5
	midnight sky	04412	6.8	31.43
	steel blue	04447	12.3	41.66
	denim	04486	5.2	27.29
	midnight apricot	04674	7.0	31.79
	apricot	04675	18.4	50.03
	powder pink	04800	24.1	56.17
	midnight powder pink	04801	8.4	34.83
	copper	04865	12.1	41.43
	rosewood	04870	13.4	43.39
Fragment Colours available	marble	53100	25.9	57.97
	azurite	53485	3.1	20.53
	granite	53500	3.3	21.30
	mica	53518	10.2	38.26
	mortar	53530	11.5	40.44
	limestone	53535	13.2	43.01
	anthracite	53555	5.8	28.94
	chromite	53580	10.3	38.38
	mix	53597	7.0	31.88

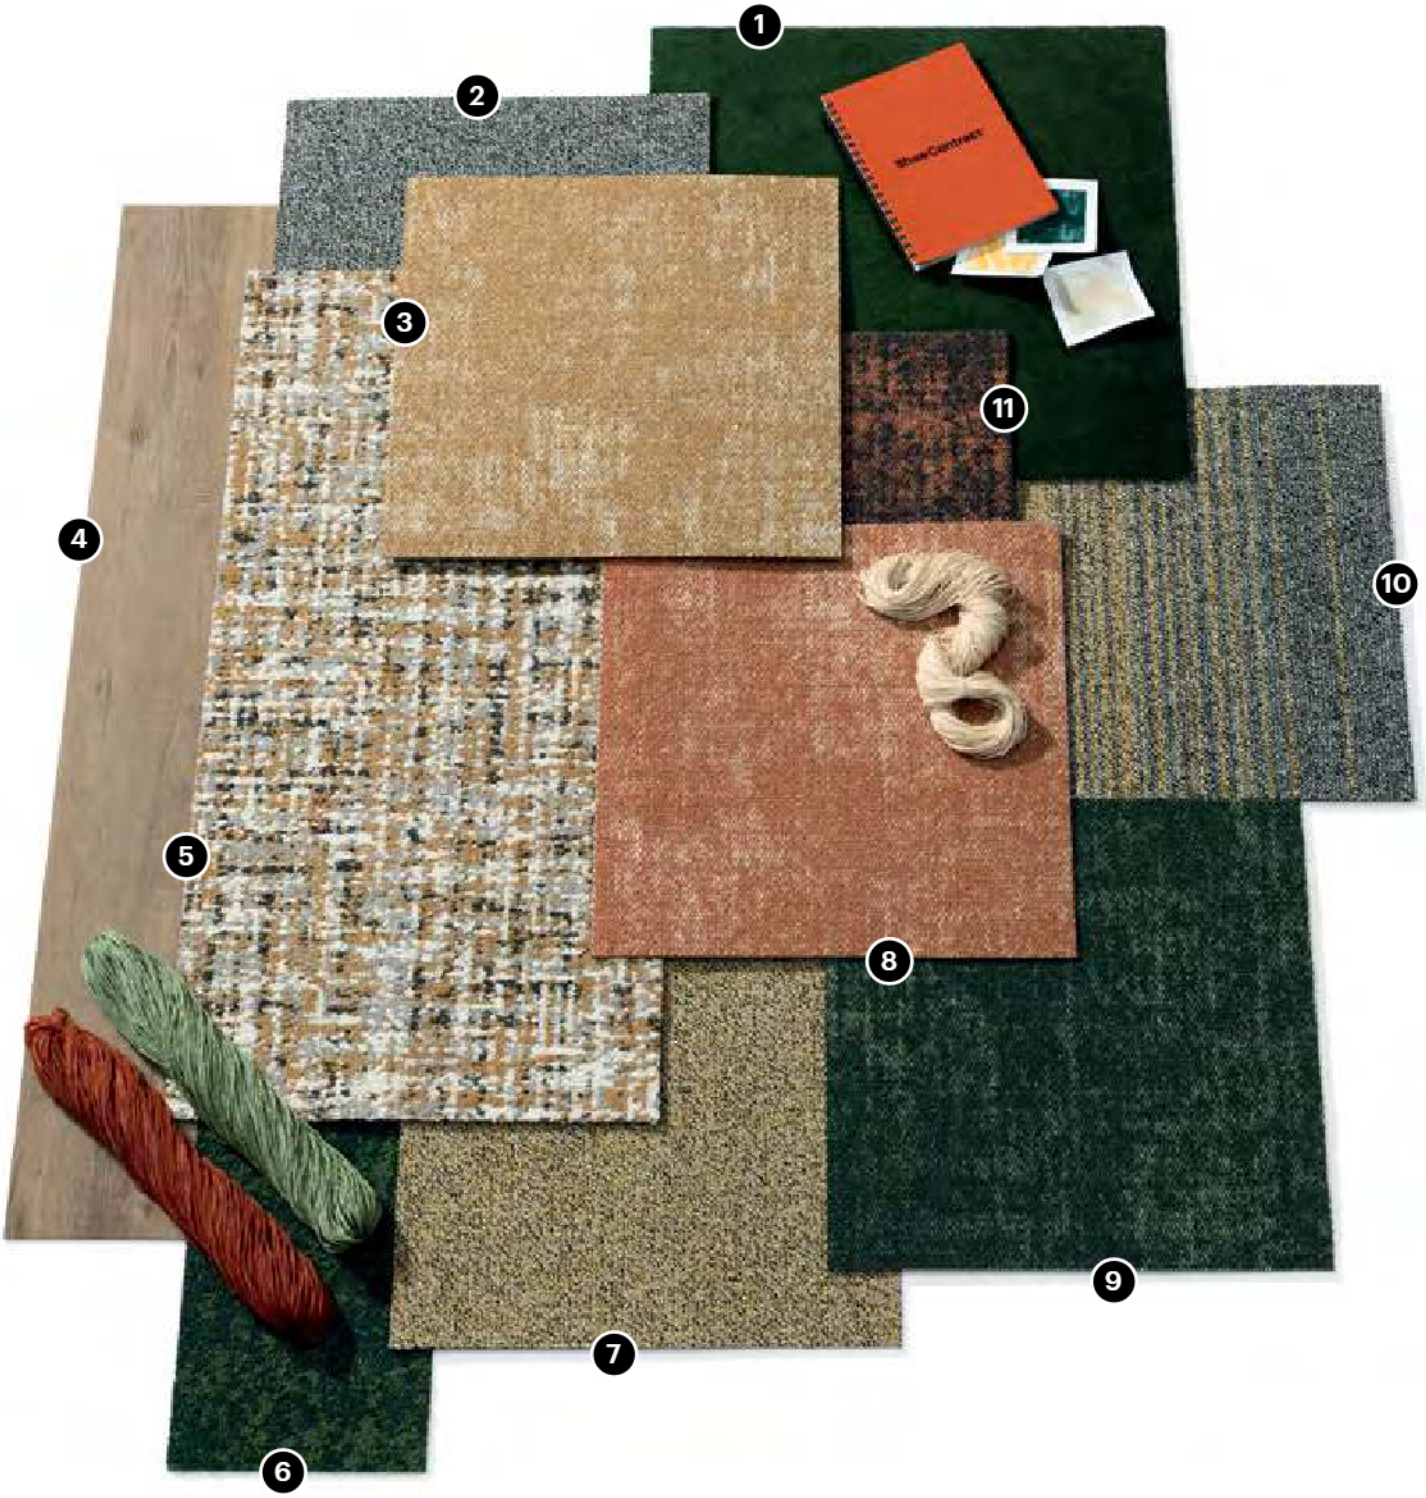

Saturated palette
Earthy grounded. Offers reassurance & stability. Luxurious and timeless quality.

1. **Dye Lab** Fustic Wood 41315
2. **Belong** Hearten 48515
3. **Fragment Colours** Brushed Gold 04210
4. **Nordic** Golden 77756
5. **Textile** Saffron 79210
6. **Endless** Forests 05334
7. **Belong** Golden 48211
8. **Fragment Colours** Apricot 04675
9. **Fragment Colours** Racing Green 04334
10. **Together** Hearten Golden 48211
11. **Formation Colours** Midnight Apricot 04674

Pastel palette

Gentle, considered. Informed by nature with an optimistic and refreshing tone. Serene vibes.

1. **Belong** Rosewood 48870
2. **Dye Lab** Black Walnut 41402
3. **Fragment** Marble 53100
4. **Nordic** Fir 77155
5. **Fragment Colours** Powder Pink 04800
6. **Fragment Colours** Steel Blue 04447
7. **Familiar** Rosewood 35870
8. **Formation Colours** Midnight Powder Pink 04801
9. **Fragment Colours** Mineral 04327
10. **Nordic Honey** 77103
11. **Observe** Optimistic 05105
12. **Belong** Greige 48516
13. **Fragment Colours** Oatmeal 04111

1. **Formation Colours** Midnight Apricot 04674
2. **Dye lab** Iron 41580
3. **Identity** Mint 35327
4. **Fragment Colours** Midnight Mineral 04328
5. **Nordic Fir** 77155
6. **Formation Colours** Mineral 04327
7. **Formation Colours** Apricot 04675
8. **Fragment Colours** Steel Blue 04447
9. **Dye lab** Saxon 41462
10. **Honest** Overdye 35496
11. **Fragment Colours** Denim 04486
12. **Formation Colours** Midnight Sky 04412
13. **Formation Colours** Sky 04412

Subtle Colour Accent palette

Layered and reliable.
Restrained tones with hints of subtle accents.

3 Backing Options

EcoWorx S™

– high performance polyolefin plastomer backing

100%

close loop recyclable backing solution

EcoSolution Q100™

100%

recycled content nylon fibre, optimised for low carbon and carbon neutral

Embodied Carbon (EPD Calculation A1-A3)

4.91 kg CO_2 e/m²

EcoWorx S carpet tile weighs

50%

less than bitumen-backed carpet tile

TaskWorx

– High performance polymer modified bitumen backing

100%

Utilising waste raw material & **100% recycled** content filler

EcoSolution Q100™

100%

recycled content nylon fibre, optimised for low carbon and carbon neutral

Embodied Carbon (EPD Calculation A1-A3)

3.58 kg CO_2 e/m²

TaskWorx carpet tile is Air Comfort Gold certified for low emitting products

ComfortWorx

– High performance acoustic and underfoot comfort carpet tile backing

90%

Matrix pad Matrix pad made from 90% recycled PET bottles. 67 bottles are using in every m²

EcoSolution Q100™

100%

recycled content nylon fibre, optimised for low carbon and carbon neutral

Embodied Carbon (EPD Calculation A1-A3)

5.10 kg CO_2 e/m²

ComfortWorx carpet tile delivers

65%

Improvement in sound aborption performance compared to other hard backed carpet tiles or hard surfaces

Closing the loop

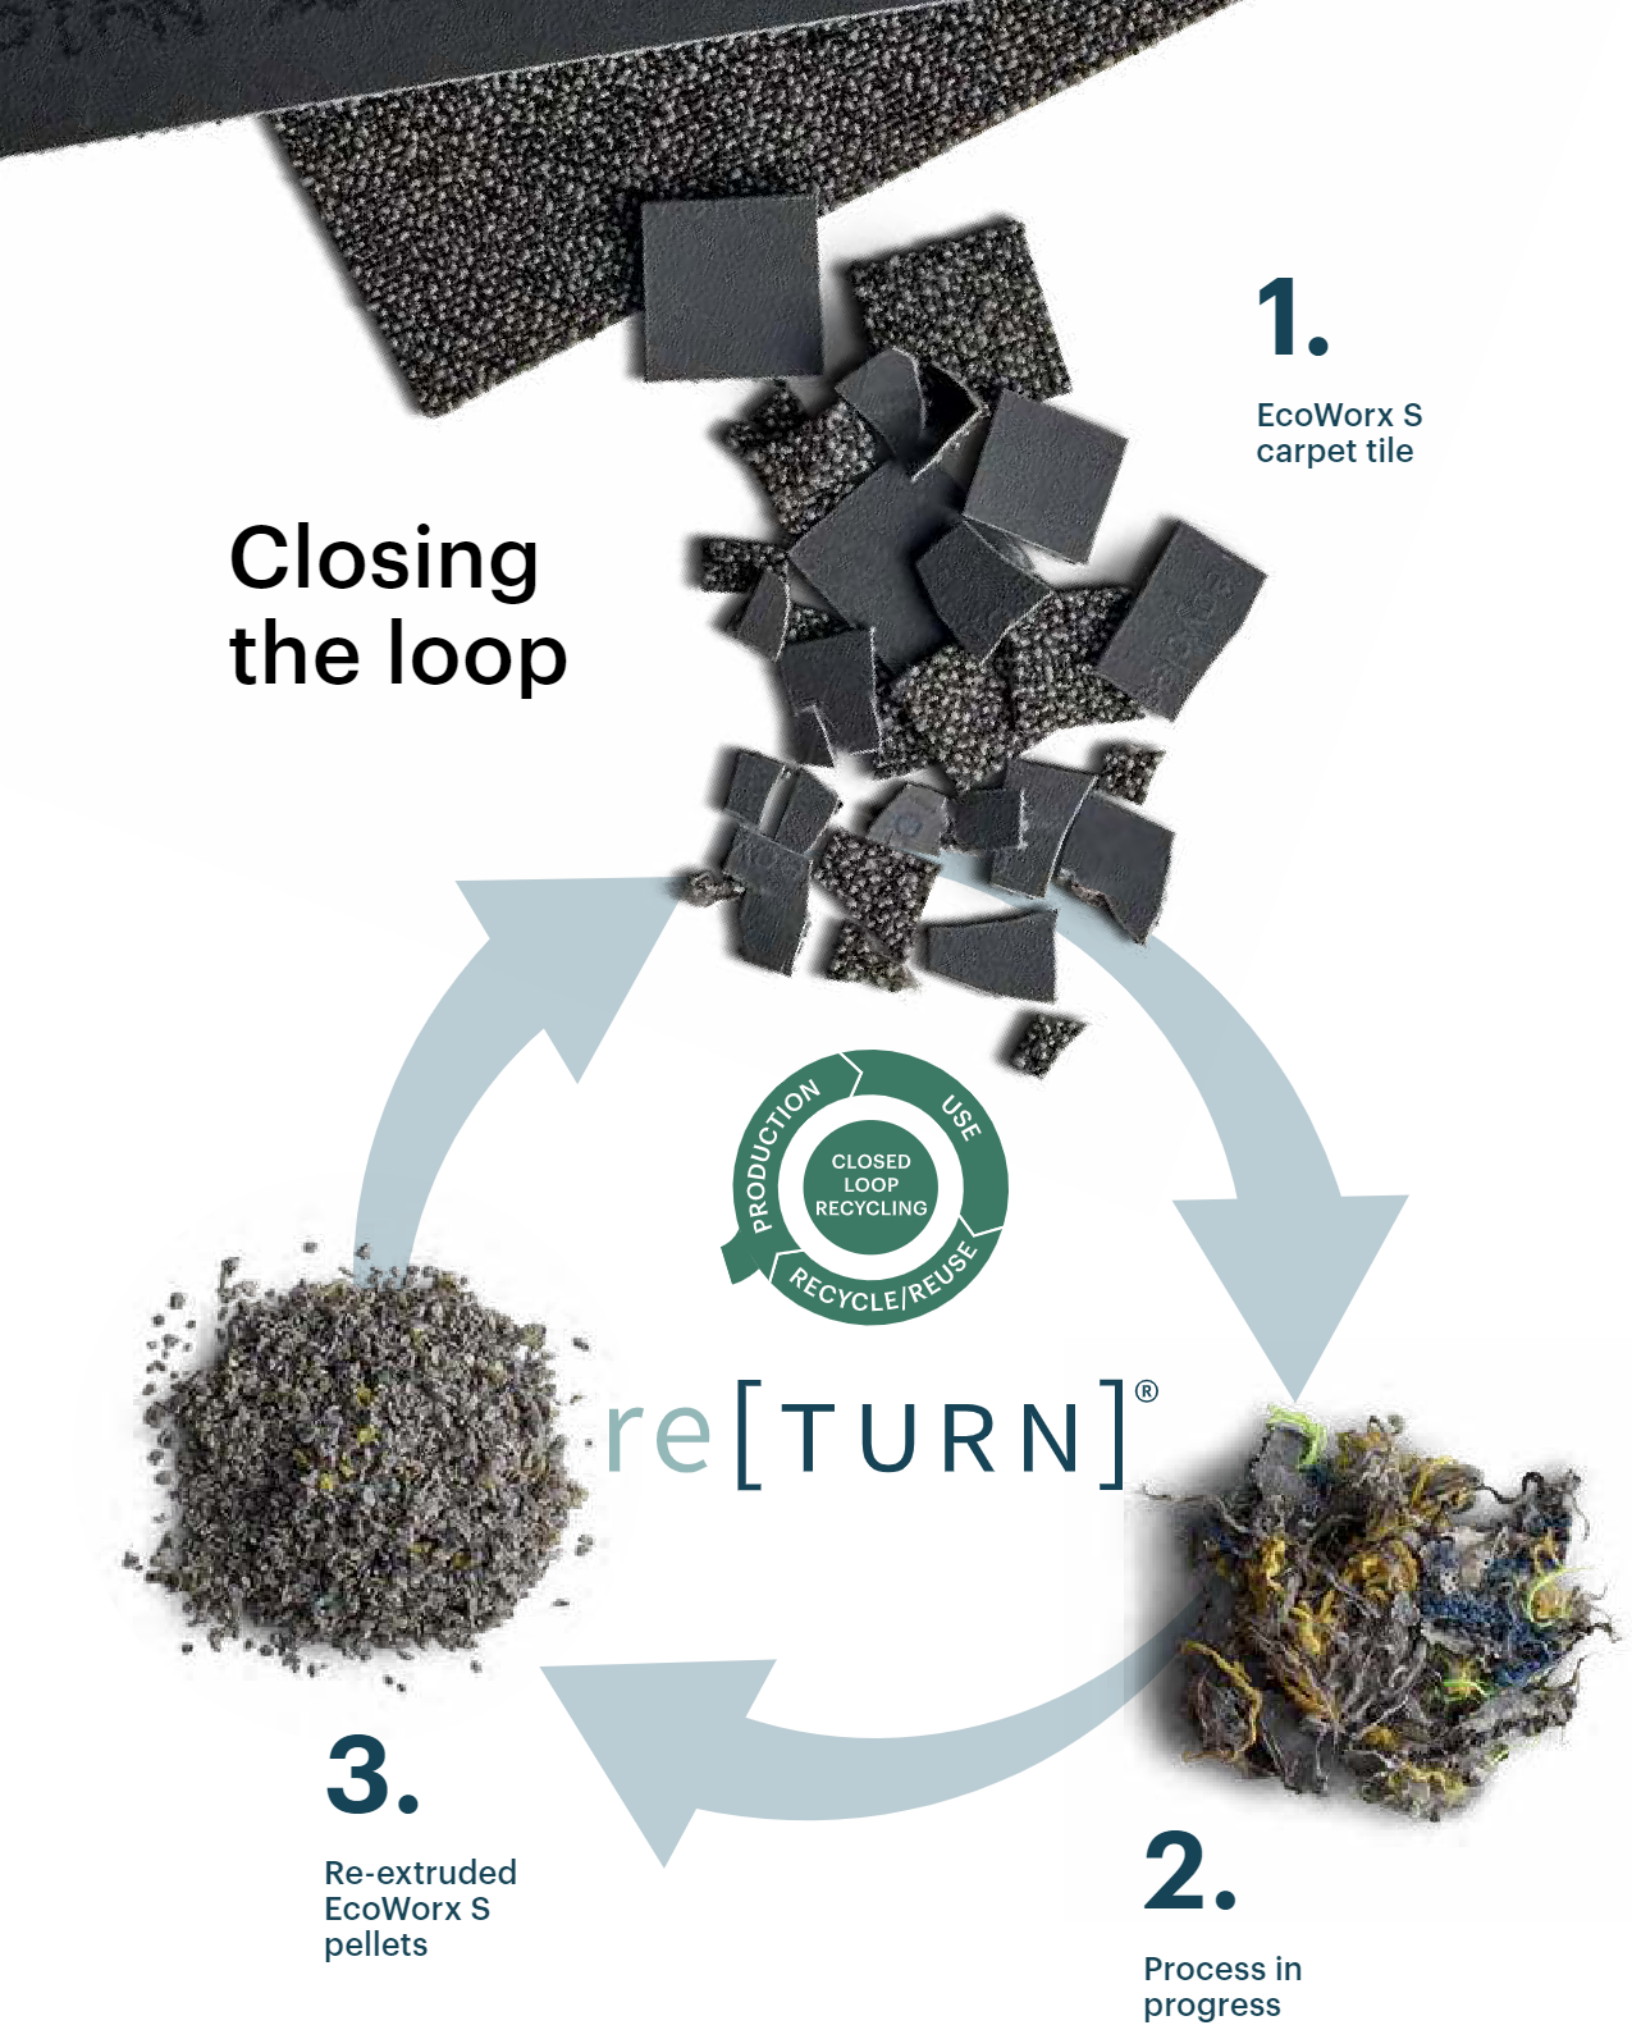

Floor Architecture III

3 **Styles**

Stone
Fragment
Formation

3 **Colour Groups**

Saturated
Pastel
Subtle Colour Accents

3 **Backing Options**

TaskWorx
EcoWorx S
ComfortWorx

27
Options

18
New colours

9
Neutrals

Stone

	TaskWorx	Ecoworx S	Comfortworx
Style number:	5T454	5T580	C018W
Collection:	Floor Architecture III	Floor Architecture III	Floor Architecture III
Product type:	Carpet tile	Carpet tile	Carpet tile

Construction / Data + Performance

Type of manufacture	Tufted 1/10" | 39.4 per 10 cm	Tufted 1/10" | 39.4 per 10cm	Tufted 1/10" | 39.4 per 10 cm
Aspect	Multi-level pattern loop	Multi-level pattern loop	Multi-level pattern loop
Dye method	100% solution dyed	100% solution dyed	100% solution dyed
Dimensions	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 16 tiles (4 m²) per box
Primary backing	PET non-woven	PET non-woven	PET non-woven
Secondary backing	Taskworx® Tile | 100% recycled calcium carbonate filler	Ecoworx S™ Polyolefin Plastomer	ComfortWorx® Tile | Matrix Pad Layer Contains 90% Recycled Content
Pile fibre composition	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten	Eco Solution Q100™ Polyamide 6 | Contains 100% Recycled Content	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten
Total thickness	6.7 mm	6.0 mm	11.5 mm
Effective Pile thickness	3.3 mm	1.9 mm	3.0 mm
Total mass	3980 g/m²	2380 g/m²	4240 g/m²
Nominal total pile mass	630 g/m²	630 g/m²	630 g/m²
Effective pile mass	354 g/m²	238 g/m²	323 g/m²
Pile density	0.108 g/m²	0.123 g/cm³	0.107 g/m²
Embodied Carbon (EPD Calculation A1-A3)	3.58 kg CO_2 e/m²	4.91 kg CO_2 e/m²₂	5.10 kg CO_2 e/m²
Recommended installation methods	Monolithic, Quarter turn, Ashlar, Brick, Random	Monolithic, Quarter turn, Ashlar, Brick, Random	Monolithic, Quarter turn, Ashlar, Brick, Random

Made in the UK

Carbon Neutral
Low Embodied Carbon

For detailed warranty information and the most accurate information on the recycle content please visit shawcontract.com
Pour plus de détails sur les garanties et plus d'information sur le contenu recyclé rendez-vous sur shawcontract.com
Voor meer informatie over de garantie en voor de meest recente informatie over recycling, ga naar shawcontract.com
Detaillierte Informationen über Gewährleistungen und den genauen Recyclinganteil finden Sie unter shawcontract.com

Recommended installation methods
Méthodes d'installation conseillées | Advies tapijttegels leggen | Empfohlene Installationsmethoden

Monolithic Quarter turn Ashlar Brick Random

EcoWorx S	26db	0.20 aw
TaskWorx	26db	0.15 aw
ComfortWorx	37db	0.30 aw

CE
22
EU.DOP/2895/CPR/1222/0323/EST
Oosterhout Showroom
Vaartweg 10, 4905 BL Netherlands (NLD)
Notified Body 2895

UK CA
22
UK.DOP/0338/CPR/1222/0323/EST
Blackaddie Road Industrial Estate,
Sanquhar, DG4 6DB, UK
Approved Body 0338

E1 HCHO
EN 14041:2004/AC 2006
For use as an indoor floor covering as specified by the manufacturer

London +44 (0) 20 7961 4120 | Paris +33 (0)1 81 22 44 39 | Dubai +971 4 584 6956 | Oosterhout +31 20 2620955

Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Visit shawcontract.com for more information.
L'approvisionnement des matériaux et/ou les procédés de fabrication peuvent nécessiter des modifications de caractéristiques sans avertissement. Pour plus d'informations, veuillez vous rendre sur shawcontract.com
Specificaties voor de levering van materialen en/of productieprocessen kunnen indien nodig zonder voorafgaande kennisgeving worden gewijzigd. Ga naar shawcontract.com voor meer informatie.
Die Spezifikationen unterliegen den nominalen Fertigungsschwankungen. Materialversorgungs- und/oder Fertigungsprozesse können ohne Vorankündigung zu Spezifikationsänderungen führen. Weitere Informationen finden Sie unter shawcontract.com

Stone Colours

	TaskWorx	Ecoworx S	Comfortworx
Style number:	5T586	5T587	C040W
Collection:	Floor Architecture III	Floor Architecture III	Floor Architecture III
Product type:	Carpet tile	Carpet tile	Carpet tile

Construction	Data + Performance		
Type of manufacture	Tufted 1/10" | 39.4 per 10 cm	Tufted 1/10" | 39.4 per 10 cm	Tufted 1/10" | 39.4 per 10 cm
Aspect	Multi-level pattern loop	Multi-level pattern loop	Multi-level pattern loop
Dye method	100% solution dyed	100% solution dyed	100% solution dyed
Dimensions	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 16 tiles (4 m²) per box
Primary backing	PET non-woven	PET non-woven	PET non-woven
Secondary backing	Taskworx® Tile | 100% recycled calcium carbonate filler	Ecoworx S™ Polyolefin Plastomer	ComfortWorx® Tile | Matrix Pad Layer Contains 90% Recycled Content
Pile fibre composition	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten	Eco Solution Q100™ Polyamide 6 | Contains 100% Recycled Content	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten
Total thickness	6.8 mm	6.1mm	11.1mm
Effective Pile thickness	2.7 mm	2.8mm	2.8mm
Total mass	3825 g/m²	2478 g/m²	4069 g/m²
Nominal total pile mass	630 g/m²	630 g/m²	630 g/m²
Effective pile mass	297 g/m²	308 g/m²	308 g/m²
Pile density	0.108 g/m²	0.111 g/cm³	0.109 g/cm³
Embodied Carbon (EPD Calculation A1-A3)	3.58 kg CO_2 e/m²	4.91 kg CO_2 e/m²	5.10 kg CO_2 e/m²
Recommended installation methods	Monolithic, Quarter turn, Ashlar, Brick, Random	Monolithic, Quarter turn, Ashlar, Brick, Random	Monolithic, Quarter turn, Ashlar, Brick, Random

Made in the UK

Carbon Neutral
Low Embodied Carbon

For detailed warranty information and the most accurate information on the recycle content please visit shawcontract.com
Pour plus de détails sur les garanties et plus d'information sur le contenu recyclé rendez-vous sur shawcontract.com
Voor meer informatie over de garantie en voor de meest recente informatie over recycling, ga naar shawcontract.com
Detaillierte Informationen über Gewährleistungen und den genauen Recyclinganteil finden Sie unter shawcontract.com

Recommended installation methods
Méthodes d'installation conseillées | Advies tapijttegels leggen | Empfohlene Installationsmethoden



EcoWorx S	26db	0.20 aw
TaskWorx	26db	0.15 aw
ComfortWorx	37db	0.30 aw

CE
22
EU.DOP/2895/CPR/1222/0323/EST
Oosterhout Showroom
Vaartweg 10, 4905 BL Netherlands (NLD)
Notified Body 2895

UK CA
22
UK.DOP/0338/CPR/1222/0323/EST
Blackaddie Road Industrial Estate,
Sanquhar, DG4 6DB, UK
Approved Body 0338

E1 HCHO | Bfl-s1 | DS

EN 14041:2004/AC 2006
For use as an indoor floor covering as specified by the manufacturer

London +44 (0) 20 7961 4120 | Paris +33 (0)1 81 22 44 39 | Dubai +971 4 584 6956 | Oosterhout +31 20 2620955

Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Visit shawcontract.com for more information.
L'approvisionnement des matériaux et/ou les procédés de fabrication peuvent nécessiter des modifications de caractéristiques sans avertissement. Pour plus d'informations, veuillez vous rendre sur shawcontract.com
Specificaties voor de levering van materialen en/of productieprocessen kunnen indien nodig zonder voorafgaande kennisgeving worden gewijzigd. Ga naar shawcontract.com voor meer informatie.
Die Spezifikationen unterliegen den nominalen Fertigungsschwankungen. Materialversorgungs- und/oder Fertigungsprozesse können ohne Vorankündigung zu Spezifikationsänderungen führen. Weitere Informationen finden Sie unter shawcontract.com

Fragment

	TaskWorx	Ecoworx S	Comfortworx
Style number:	5T453	5T579	C019W
Collection:	Floor Architecture III	Floor Architecture III	Floor Architecture III
Product type:	Carpet tile	Carpet tile	Carpet tile

Construction / Data + Performance

Type of manufacture	Tufted 1/12" | 47.2 per 10 cm	Tufted 1/12" | 47.2 per 10cm	Tufted 1/12" | 47.2 per 10 cm
Aspect	Multi-level pattern loop	Multi-level pattern loop	Multi-level pattern loop
Dye method	100% solution dyed	100% solution dyed	100% solution dyed
Dimensions	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 16 tiles (4 m²) per box
Primary backing	PET non-woven	PET non-woven	PET non-woven
Secondary backing	Taskworx® Tile | 100% recycled calcium carbonate filler	Ecoworx S™ Polyolefin Plastomer	ComfortWorx® Tile | Matrix Pad Layer Contains 90% Recycled Content
Pile fibre composition	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten	Eco Solution Q100™ Polyamide 6 | Contains 100% Recycled Content	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten
Total thickness	6.2 mm	5.6 mm	11.3 mm
Effective Pile thickness	2.7 mm	1.7 mm	2.9 mm
Total mass	3934 g/m²	2287 g/m²	4262 g/m²
Nominal total pile mass	630 g/m²	630 g/m²	630 g/m²
Effective pile mass	300 g/m²	201 g/m²	288 g/m²
Pile density	0.120 g/m²	0.115 g/cm³	0.097 g/m²
Embodied Carbon (EPD Calculation A1-A3)	3.58 kg CO_2 e/m²	4.91 kg CO_2 e/m²	5.10 kg CO_2 e/m²
Recommended installation methods	Monolithic, Quarter turn, Ashlar, Brick, Random	Monolithic, Quarter turn, Ashlar, Brick, Random	Monolithic, Quarter turn, Ashlar, Brick, Random

Made in the UK

Carbon Neutral
Low Embodied Carbon

For detailed warranty information and the most accurate information on the recycle content please visit shawcontract.com
Pour plus de détails sur les garanties et plus d'information sur le contenu recyclé rendez-vous sur shawcontract.com
Voor meer informatie over de garantie en voor de meest recente informatie over recycling, ga naar shawcontract.com
Detaillierte Informationen über Gewährleistungen und den genauen Recyclinganteil finden Sie unter shawcontract.com

Recommended installation methods
Méthodes d'installation conseillées | Advies tapijttegels leggen | Empfohlene Installationsmethoden

Monolithic | Quarter turn | Ashlar | Brick | Random

EcoWorx S	26db	0.20 aw
TaskWorx	26db	0.15 aw
ComfortWorx	37db	0.30 aw

CE 22
EU.DOP/2895/CPR/1222/0323/EST
Oosterhout Showroom
Vaartweg 10, 4905 BL Netherlands (NLD)
Notified Body 2895

UKCA 22
UK.DOP/0338/CPR/1222/0323/EST
Blackaddie Road Industrial Estate,
Sanquhar, DG4 6DB, UK
Approved Body 0338

EN 14041:2004/AC 2006
For use as an indoor floor covering as specified by the manufacturer

London +44 (0) 20 7961 4120 | Paris +33 (0)1 81 22 44 39 | Dubai +971 4 584 6956 | Oosterhout +31 20 2620955

Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Visit shawcontract.com for more information.
L'approvisionnement des matériaux et/ou les procédés de fabrication peuvent nécessiter des modifications de caractéristiques sans avertissement. Pour plus d'informations, veuillez vous rendre sur shawcontract.com
Specificaties voor de levering van materialen en/of productieprocessen kunnen indien nodig zonder voorafgaande kennisgeving worden gewijzigd. Ga naar shawcontract.com voor meer informatie.
Die Spezifikationen unterliegen den nominalen Fertigungsschwankungen. Materialversorgungs- und/oder Fertigungsprozesse können ohne Vorankündigung zu Spezifikationsänderungen führen. Weitere Informationen finden Sie unter shawcontract.com

Fragment Colours

	TaskWorx	Ecoworx S	Comfortworx
Style number:	5T520	5T505	C039W
Collection:	Floor Architecture III	Floor Architecture III	Floor Architecture III
Product type:	Carpet tile	Carpet tile	Carpet tile

Construction	Data + Performance		
Type of manufacture	Tufted 1/12" | 47.2 per 10cm	Tufted 1/12" | 47.2 per 10cm	Tufted 1/12" | 47.2 per 10cm
Aspect	Multi-level pattern loop	Multi-level pattern loop	Multi-level pattern loop
Dye method	100% solution dyed	100% solution dyed	100% solution dyed
Dimensions	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 16 tiles (4 m²) per box
Primary backing	PET non-woven	PET non-woven	PET non-woven
Secondary backing	Taskworx® Tile | 100% recycled calcium carbonate filler	Ecoworx S™ Polyolefin Plastomer	ComfortWorx® Tile | Matrix Pad Layer Contains 90% Recycled Content
Pile fibre composition	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten	Eco Solution Q100™ Polyamide 6 | Contains 100% Recycled Content	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten
Total thickness	5.9 mm	5.5 mm	9.5 mm
Effective Pile thickness	2.0 mm	1.7 mm	1.9 mm
Total mass	3866 g/m²	2632 g/m²	4346 g/m²
Nominal total pile mass	634 g/m²	634 g/m²	634 g/m²
Effective pile mass	244 g/m²	207 g/m²	224 g/m²
Pile density	0.120 g/cm³	0.118 g/cm³	0.120 g/cm³
Embodied Carbon (EPD Calculation A1-A3)	3.58 kg CO_2 e/m²	4.91 kg CO_2 e/m²	5.10 kg CO_2 e/m²
Recommended installation methods	Monolithic, Quarter turn, Ashlar, Brick, Random	Monolithic, Quarter turn, Ashlar, Brick, Random	Monolithic, Quarter turn, Ashlar, Brick, Random

Made in the UK

Carbon Neutral
Low Embodied Carbon

For detailed warranty information and the most accurate information on the recycle content please visit shawcontract.com
Pour plus de détails sur les garanties et plus d'information sur le contenu recyclé rendez-vous sur shawcontract.com
Voor meer informatie over de garantie en voor de meest recente informatie over recycling, ga naar shawcontract.com
Detaillierte Informationen über Gewährleistungen und den genauen Recyclinganteil finden Sie unter shawcontract.com

Recommended installation methods
Méthodes d'installation conseillées | Advies tapijttegels leggen | Empfohlene Installationsmethoden

Monolithic Quarter turn Ashlar Brick Random

EcoWorx S	26db	0.20 aw
TaskWorx	26db	0.15 aw
ComfortWorx	37db	0.30 aw

CE
22
EU.DOP/2895/CPR/1222/0323/EST
Oosterhout Showroom
Vaartweg 10, 4905 BL Netherlands (NLD)
Notified Body 2895

UK CA
22
UK.DOP/0338/CPR/1222/0323/EST
Blackaddie Road Industrial Estate,
Sanquhar, DG4 6DB, UK
Approved Body 0338

E1 HCHO Bfl-s1 DS
EN 14041:2004/AC 2006
For use as an indoor floor covering as specified by the manufacturer

London +44 (0) 20 7961 4120 | Paris +33 (0)1 81 22 44 39 | Dubai +971 4 584 6956 | Oosterhout +31 20 2620955

Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Visit shawcontract.com for more information.
L'approvisionnement des matériaux et/ou les procédés de fabrication peuvent nécessiter des modifications de caractéristiques sans avertissement. Pour plus d'informations, veuillez vous rendre sur shawcontract.com
Specificaties voor de levering van materialen en/of productieprocessen kunnen indien nodig zonder voorafgaande kennisgeving worden gewijzigd. Ga naar shawcontract.com voor meer informatie.
Die Spezifikationen unterliegen den nominalen Fertigungsschwankungen. Materialversorgungs- und/oder Fertigungsprozesse können ohne Vorankündigung zu Spezifikationsänderungen führen. Weitere Informationen finden Sie unter shawcontract.com

Formation

	TaskWorx	Ecoworx S	Comfortworx
Style number:	5T584	5T585	C041W
Collection:	Floor Architecture III	Floor Architecture III	Floor Architecture III
Product type:	Carpet tile	Carpet tile	Carpet tile

Construction	Data + Performance		
Type of manufacture	Tufted 1/12" | 47.2 per 10cm	Tufted 1/12" | 47.2 per 10cm	Tufted 1/12" | 47.2 per 10cm
Aspect	Multi-level pattern loop	Multi-level pattern loop	Multi-level pattern loop
Dye method	100% solution dyed	100% solution dyed	100% solution dyed
Dimensions	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 16 tiles (4 m²) per box
Primary backing	PET non-woven	PET non-woven	PET non-woven
Secondary backing	Taskworx® Tile | 100% recycled calcium carbonate filler	Ecoworx S™ Polyolefin Plastomer	ComfortWorx® Tile | Matrix Pad Layer Contains 90% Recycled Content
Pile fibre composition	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten	Eco Solution Q100™ Polyamide 6 | Contains 100% Recycled Content	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten
Total thickness	6.3 mm	5.4 mm	10.0 mm
Effective Pile thickness	1.9 mm	2.1 mm	2.1 mm
Total mass	4067 g/m²	2558 g/m²	3741 g/m²
Nominal total pile mass	630 g/m²	630 g/m²	630 g/m²
Effective pile mass	190 g/m²	269 g/m²	275 gg/m²
Pile density	0.100 g/cm³	0.127 g/cm³	0.133 g/cm³
Embodied Carbon (EPD Calculation A1-A3)	3.58 kg CO_2 e/m²	4.91 kg CO_2 e/m²	5.10 kg CO_2 e/m²
Recommended installation methods	Quarter Turn, Brick, Random	Quarter Turn, Brick, Random	Quarter Turn, Brick, Random

Made in the UK

Carbon Neutral
Low Embodied Carbon

For detailed warranty information and the most accurate information on the recycle content please visit shawcontract.com
Pour plus de détails sur les garanties et plus d'information sur le contenu recyclé rendez-vous sur shawcontract.com
Voor meer informatie over de garantie en voor de meest recente informatie over recycling, ga naar shawcontract.com
Detaillierte Informationen über Gewährleistungen und den genauen Recyclinganteil finden Sie unter shawcontract.com

Recommended installation methods
Méthodes d'installation conseillées | Advies tapijttegels leggen | Empfohlene Installationsmethoden

Monolithic | Quarter turn | Ashlar | Brick | Random

EcoWorx S	26db	0.20 aw
TaskWorx	26db	0.15 aw
ComfortWorx	37db	0.30 aw

CE
22
EU.DOP/2895/CPR/1222/0323/EST
Oosterhout Showroom
Vaartweg 10, 4905 BL Netherlands (NLD)
Notified Body 2895

UK CA
22
UK.DOP/0338/CPR/1222/0323/EST
Blackaddie Road Industrial Estate,
Sanquhar, DG4 6DB, UK
Approved Body 0338

E1 HCHO | Bfl-s1 | DS
EN 14041:2004/AC 2006
For use as an indoor floor covering as specified by the manufacturer

London +44 (0) 20 7961 4120 | Paris +33 (0)1 81 22 44 39 | Dubai +971 4 584 6956 | Oosterhout +31 20 2620955

Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Visit shawcontract.com for more information.
L'approvisionnement des matériaux et/ou les procédés de fabrication peuvent nécessiter des modifications de caractéristiques sans avertissement. Pour plus d'informations, veuillez vous rendre sur shawcontract.com
Specificaties voor de levering van materialen en/of productieprocessen kunnen indien nodig zonder voorafgaande kennisgeving worden gewijzigd. Ga naar shawcontract.com voor meer informatie.
Die Spezifikationen unterliegen den nominalen Fertigungsschwankungen. Materialversorgungs- und/oder Fertigungsprozesse können ohne Vorankündigung zu Spezifikationsänderungen führen. Weitere Informationen finden Sie unter shawcontract.com

Formation Colours

	TaskWorx	Ecoworx S	Comfortworx
Style number:	5T519	5T504	C037W
Collection:	Floor Architecture III	Floor Architecture III	Floor Architecture III
Product type:	Carpet tile	Carpet tile	Carpet tile

Construction

Data + Performance

Type of manufacture	Tufted 1/12" | 47.2 per 10cm	Tufted 1/12" | 47.2 per 10cm	Tufted 1/12" | 47.2 per 10cm
Aspect	Multi-level pattern loop	Multi-level pattern loop	Multi-level pattern loop
Dye method	100% solution dyed	100% solution dyed	100% solution dyed
Dimensions	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 20 tiles (5 m²) per box	50 x 50 cm | 16 tiles (4 m²) per box
Primary backing	PET non-woven	PET non-woven	PET non-woven
Secondary backing	Taskworx® Tile | 100% recycled calcium carbonate filler	Ecoworx S™ Polyolefin Plastomer	ComfortWorx® Tile | Matrix Pad Layer Contains 90% Recycled Content
Pile fibre composition	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten	Eco Solution Q100™ Polyamide 6 | Contains 100% Recycled Content	Eco Solution Q100 Polyamide 6 | Contains 100% Recycled Conten
Total thickness	6.0 mm	5.8 mm	10.6 mm
Effective Pile thickness	1.7 mm	2.1 mm	2.0 mm
Total mass	4137 g/m²	2736 g/m²	4348 g/m²
Nominal total pile mass	670 g/m²	670 g/m²	670 g/m²
Effective pile mass	216 g/m²	235 g/m²	258 g/m²
Pile density	0.124 g/cm³	0.113 g/cm³	0.123 g/cm³
Embodied Carbon (EPD Calculation A1-A3)	3.58 kg CO_2 e/m²	4.91 kg CO_2 e/m²	5.10 kg CO_2 e/m²
Recommended installation methods	Quarter Turn, Brick, Random	Quarter Turn, Brick, Random	Quarter Turn, Brick, Random

Made in the UK

Carbon Neutral
Low Embodied Carbon

For detailed warranty information and the most accurate information on the recycle content please visit shawcontract.com
Pour plus de détails sur les garanties et plus d'information sur le contenu recyclé rendez-vous sur shawcontract.com
Voor meer informatie over de garantie en voor de meest recente informatie over recycling, ga naar shawcontract.com
Detaillierte Informationen über Gewährleistungen und den genauen Recyclinganteil finden Sie unter shawcontract.com

Recommended installation methods
Méthodes d'installation conseillées | Advies tapijttegels leggen | Empfohlene Installationsmethoden



EcoWorx S	26db	0.20 aw
TaskWorx	26db	0.15 aw
ComfortWorx	37db	0.30 aw

CE
22
EU.DOP/2895/CPR/1222/0323/EST
Oosterhout Showroom
Vaartweg 10, 4905 BL Netherlands (NLD)
Notified Body 2895

UK CA
22
UK.DOP/0338/CPR/1222/0323/EST
Blackaddie Road Industrial Estate,
Sanquhar, DG4 6DB, UK
Approved Body 0338

E1 HCHO | Bfl-s1 | DS

EN 14041:2004/AC 2006
For use as an indoor floor covering as specified by the manufacturer

London +44 (0) 20 7961 4120 | Paris +33 (0)1 81 22 44 39 | Dubai +971 4 584 6956 | Oosterhout +31 20 2620955

Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Visit shawcontract.com for more information.
L'approvisionnement des matériaux et/ou les procédés de fabrication peuvent nécessiter des modifications de caractéristiques sans avertissement. Pour plus d'informations, veuillez vous rendre sur shawcontract.com
Specificaties voor de levering van materialen en/of productieprocessen kunnen indien nodig zonder voorafgaande kennisgeving worden gewijzigd. Ga naar shawcontract.com voor meer informatie.
Die Spezifikationen unterliegen den nominalen Fertigungsschwankungen. Materialversorgungs- und/oder Fertigungsprozesse können ohne Vorankündigung zu Spezifikationsänderungen führen. Weitere Informationen finden Sie unter shawcontract.com

ShawContract®

London +44 (0) 20 7961 4120 | Paris +33 (0)1 81 22 44 39 | Dubai +971 4 584 6956 | Oosterhout +31 20 2620955
UK: infouk@shawcontract.com | France: infofr@shawcontract.com | Middle East/Africa: infomea@shawcontract.com | Netherlands: infonl@shawcontract.com

Corporate Headquarters +1 800 257 7429 | +1 706 532 7984 | Atlanta +1 404 853 7429 | Bangalore +080 6773 0202 | Beijing +86 10 6568 5881
Chicago +1 312 467 1331 | Hong Kong +852 2623 0371 | Latin America (Miami) +1 305 827 5912 | Los Angeles +1 800 233 1614 | Melbourne +61 3 9939 8543
Mexico City +55 5010 7600 | Nantong +86 400 800 7429 | New York +1 212 953 7429 | San Francisco +1 415 955 1920 | Santiago +562 2431 5000 x 550
São Paulo +55 11 3071 1702 | Shanghai +86 21 3338 4000 | Singapore +65 6733 1811 | Sydney +61 2 8065 1901

shawcontract.com

COVER: **FRAGMENT** MARBLE INSTALLED MONOLITHIC